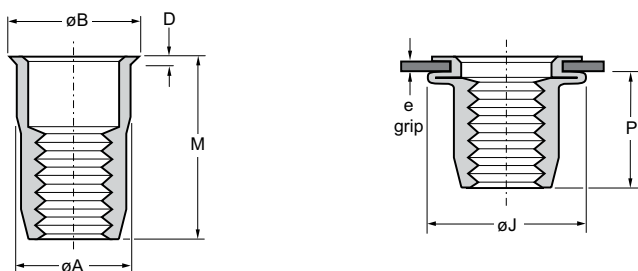








English	Français	Deutsch	Italiano	Español
Low profile	Auto-affleurante	Extra kleiner Kopf	Testa a fila	Sin ala
Splined body	Fût cannelé	Gerändelter Schaft	Corpo zigrinato	Cuerpo estriado
Low carbon steel*	Acier bas carbone*	Stahl*	Acciaio a basso tenore di carbonio*	Acero bajo en carbono*
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente

* : DIN EN 10263-2 Qst 34-3, BS EN/DIN 10263-2 C8C, Werkstoff 1.0213, SAE 1008



Thread filetage / Gewinde / filetto / rosca	e (grip)		 +0.1/-0	øA max.	øB max.	D ±0.13	øJ max.	M nom.	P max.	Part No/ref
	min.	max.								
M4 x 0.7	0.25	2.00	6.0	5.97	6.7	0.46	8.8	11.3	7.1	39006-74020
M5 x 0.8	0.25	3.00	7.0	6.97	7.8	0.46	10.2	12.7	7.9	39006-75030
M6 x 1.0	0.50	3.00	9.0	8.97	10.2	0.50	12.7	15.3	9.4	39006-76030
	3.00	5.50						17.8		39006-76055
M8 x 1.25	0.50	3.50	11.0	10.97	12.2	0.63	15.0	17.3	11.0	39006-78035
	3.50	6.00						19.8		39006-78060
M10 x 1.5	1.00	3.50	13.0	12.97	14.2	0.63	17.5	20.4	14.5	39006-70035

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Thread filetage / Gewinde / filetto / rosca	 Recommended max. torque Nm max.	 Pull-out* kN	 Torque-to-turn* Nm min.	 Push-out* kN
M4 x 0.7	5.1	3.6	2.0	1.2
M5 x 0.8	7.9	7.8	2.8	1.4
M6 x 1.0	12.4	15.8	5.0	2.6
M8 x 1.25	32.0	18.1	9.1	3.5
M10 x 1.5	45.0	20.8	16.7	3.9

* Values shown are typical and should be validated in the application / Les valeurs indiquées sont typiques et doivent être validées dans l'application / Die angegebenen Werte sind typisch und müssen in der Anwendung validiert werden / I valori riportati sono tipici e devono essere convalidate nella applicazione / Los valores mostrados son típicos y deben ser validados en la aplicación