




English	Français	Deutsch	Italiano	Español
Low profile	Auto-affleurante	Extra kleiner Kopf	Testa a fila	Sin ala
Hexagonal body	Hexagonal corps	Hexagonaler Schaft	Hexagonal corpo	Hexagonal cuerpo
Low carbon steel*	Acier bas carbone*	Stahl*	Acciaio a basso tenore di carbonio*	Acero bajo en carbono*
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente

* : DIN EN 10263-2 Qst 34-3, BS EN/DIN 10263-2 C8C, Werkstoff 1.0213, SAE 1008

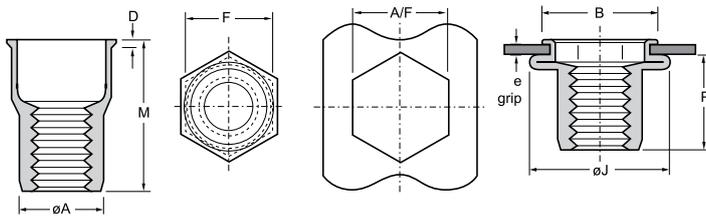

Thread filetage / Gewinde / filetto / rosca	e (grip)		A/F	øA	B	D	F	øJ	M	P	Part No/ref
	min.	max.									
M4 x 0.7	0.5	2.0	6.0	5.89	7.8	0.69	5.89	9.2	10.5	6.0	39101-74020
M5 x 0.8	0.5	3.0	7.0	6.89	9.1	0.77	6.89	11.2	12.7	8.6	39101-75030
M6 x 1.0	0.5	3.0	9.0	8.89	11.6	0.91	8.89	13.4	15.0	10.1	39101-76030
M8 x 1.25	0.5	3.0	11.0	10.89	14.2	1.07	10.89	16.2	17.5	11.4	39101-78030
M10 x 1.5	1.0	3.5	13.0	12.89	16.4	1.07	12.89	18.9	20.2	13.2	39101-70035

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Thread filetage / Gewinde / filetto / rosca	 Recommended max. torque Nm max.	 Pull-out* kN	 Torque-to-turn* Nm min.	 Push-out* kN
	M4 x 0.7	5.1	6.3	4.2
M5 x 0.8	7.9	8.8	7.5	2.6
M6 x 1.0	12.4	14.4	10.7	3.2
M8 x 1.25	32.0	15.0	22.7	4.1
M10 x 1.5	45.0	19.7	38.5	5.2

* Values shown are typical and should be validated in the application / Les valeurs indiquées sont typiques et doivent être validées dans l'application / Die angegebenen Werte sind typisch und müssen in der Anwendung validiert werden / I valori riportati sono tipici e devono essere convalidate nella applicazione / Los valores mostrados son típicos y deben ser validados en la aplicación