




English	Français	Deutsch	Italiano	Español
Large flange	A collerette	Flachkopf	Flangiato	Ala ancha
Hexagonal body	Hexagonal corps	Hexagonaler Schaft	Hexagonal corpo	Hexagonal cuerpo
Low carbon steel*	Acier bas carbone*	Stahl*	Acciaio a basso tenore di carbonio*	Acero bajo en carbono*
Zinc plated	Revêtement zingué,	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente

* : DIN EN 10263-2 Qst 34-3, BS EN/DIN 10263-2 C8C, Werkstoff 1.0213, SAE 1008

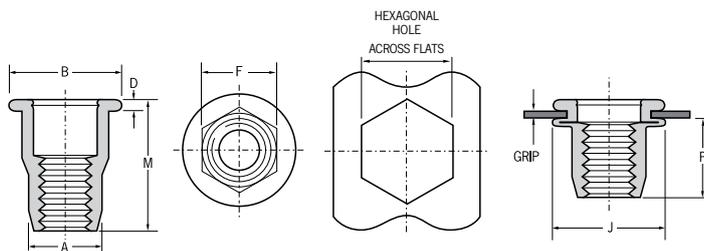

Thread filetage / Gewinde / filetto / rosca	e (grip)		A/F rec.	øA	øB	D	F	øJ	M	P	Part No/ref
	min.	max.									
M4 x 0.7	0.5	2.0	6.0	5.89	9.17	1.00	5.89	9.2	10.0	5.0	09498-72415
M5 x 0.8	0.5	3.0	7.0	6.89	10.17	1.00	6.89	11.2	13.2	7.5	09498-72516
	3.0	5.5							15.7		09498-72520
M6 x 1.0	0.5	3.0	9.0	8.89	13.20	1.50	8.89	13.4	15.5	10.1	09498-72620
M8 x 1.25	0.5	3.0	11.0	10.89	16.28	1.50	10.89	16.2	18.0	11.4	09498-72823
	3.0	5.5							20.5		09498-72826
M10 x 1.5	1.0	3.5	13.0	12.89	19.10	2.00	12.89	18.5	21.0	13.2	09498-72026
M12 x 1.75	1.5	4.5	16.0	15.89	23.30	2.25	15.89	24.2	27.8	17.0	09498-72235

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Thread filetage / Gewinde / filetto / rosca	 Recommended max. torque Nm max.	 Pull-out* kN	 Torque-to-turn* Nm min.	 Push-out* kN
	M4 x 0.7	5.1	6.3	4.5
M5 x 0.8	7.9	8.8	8.6	3.6
M6 x 1.0	12.4	14.4	11.9	5.3
M8 x 1.25	32.0	15.0	25.0	8.0
M10x x 1.5	45.0	19.7	45.2	9.2
M12 x 1.75	60.0	21.3	58.0	10.2

* Values shown are typical and should be validated in the application / Les valeurs indiquées sont typiques et doivent être validées dans l'application / Die angegebenen Werte sind typisch und müssen in der Anwendung validiert werden / I valori riportati sono tipici e devono essere convalidate nella applicazione / Los valores mostrados son típicos y deben ser validados en la aplicación