




English	Français	Deutsch	Italiano	Español
Low profile	Auto-affleurante	Extra kleiner Kopf	Testa a fila	Sin ala
Low carbon steel*	Acier bas carbone*	Stahl*	Acciaio a basso tenore di carbonio*	Acero bajo en carbono*
Zinc plated	Revêtement zingué,	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire	Klar chromatiert, Cr6-frei	Passivazione chiara	Pasivado claro trivalente
Lubricated	trivalente Lubrifié	Trockenfilmbeschichtet	trivalente Lubrificato	Lubricado

* : DIN EN 10263-2 Qst 34-3, BS EN/DIN 10263-2 C8C, Werkstoff 1.0213, SAE 1008

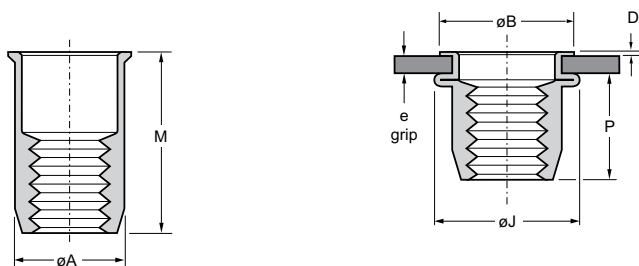

Thread filetage / Gewinde / filetto / rosca	e (grip)			ØA	ØB	D	ØJ	M	P	Part No/ref
	min.	max.	+0.1/-0	max.	max.	max.	max.	max.	max.	
M3 x 0.5	0.51	1.50	4.75	4.72	5.84	0.38	6.7	9.02	6.2	09658-70310
M4 x 0.7	0.51	2.00	6.35	6.32	7.30	0.51	8.8	10.41	7.0	09658-70413
M5 x 0.8	0.51	3.00	7.15	7.11	8.00	0.51	10.2	11.81	7.2	09658-70514
M6 x 1.0	0.76	3.25	9.55	9.50	10.67	0.76	13.2	14.60	9.5	09658-70619
M8 x 1.25	0.91	3.70	10.60	10.57	11.68	0.76	14.4	16.00	10.5	09658-75821
M10 x 1.5	1.00	3.60	14.20	14.17	16.20	0.76	19.2	18.50	11.5	09658-72022

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Thread filetage / Gewinde / filetto / rosca	 Recommended max. torque Nm max.	 Pull-out* kN	 Torque-to-turn* Nm min.	 Push-out* kN
M3 x 0.5	1.5	2.7	0.4	0.8
M4 x 0.7	5.1	6.6	1.9	1.5
M5 x 0.8	7.9	8.0	2.6	1.9
M6 x 1.0	12.4	11.4	3.4	2.4
M8 x 1.25	16.4	15.7	3.6	2.8
M10 x 1.5	33.9	18.7	4.2	3.7

* Values shown are typical and should be validated in the application / Les valeurs indiquées sont typiques et doivent être validées dans l'application / Die angegebenen Werte sind typisch und müssen in der Anwendung validiert werden / I valori riportati sono tipici e devono essere convalidate nella applicazione / Los valores mostrados son típicos y deben ser validados en la aplicación