

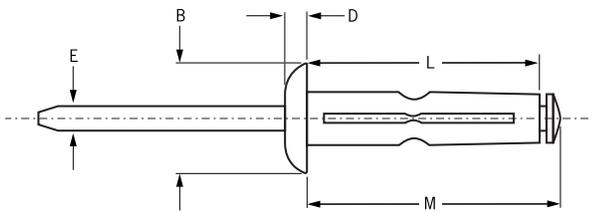




English	Français	Deutsch	Italiano	Español
Protruding head	Tête bombée	Flachrundkopf	Testa tonda	Cabeza alomada
Body: Aluminum alloy*	Corps: Alliage d'aluminium*	Hülse: Aluminium*	Corpo: Lega di alluminio*	Cuerpo: Aluminio*
Wax lubricated	Lubrifié	Gewachst	Lubrificato	Lubricado
Stem: Aluminum alloy**	Tige: Alliage d'aluminium**	Dorn: Aluminium**	Gambo: Lega di alluminio**	Vástago: Aluminio**
Wax lubricated	Lubrifié	Gewachst	Lubrificato	Lubricado

\*: 5056 \*\*: 2024/5056



ø nom.					M max.	øB ± .015 (0.4)	D ref.	L max.	øE ref.	 lbf (kN) <sup>1)</sup>	 lbf (kN) <sup>1)</sup>	Part No.
	min.	max.	min.	max.								
3/16" (4.8)	.050 (1.27)	.250 (6.35)	.204 (5.18)	.209 (5.31)	1.000 (25.4)	.445 (11.3)	.088 (2.4)	.895 (22.8)	.114 (2.9)	292 (1.30)	380 (1.69)	BAPK-06-04
	.187 (4.75)	.375 (9.53)			1.095 (27.9)			.990 (25.2)				BAPK-06-06
	.375 (9.53)	.562 (14.27)			1.218 (31.0)			1.113 (28.3)				BAPK-06-09
1/4" (6.4)	.060 (1.52)	.250 (6.35)	.252 (6.40)	.262 (6.65)	1.042 (26.5)	.560 (14.2)	.113 (3.0)	.925 (23.5)	.151 (3.8)	420 (1.87)	588 (2.62)	BAPK-08-04
	.187 (4.75)	.375 (9.53)			1.167 (29.7)			1.050 (26.7)				BAPK-08-06

dimensions in inches and (mm) / en pouces et (millimètre) / alle Maße in Zoll und (mm) / in pollici e (millimetri) / en pulgadas y (milímetros)  
1) typical values / valeurs moyennes / typische Werte / Valori tipici / valores típicos