



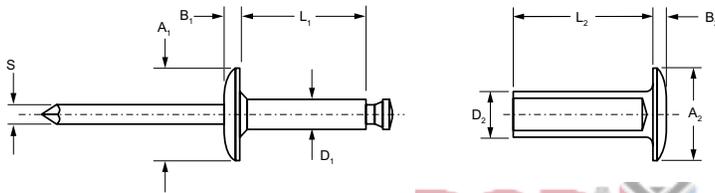


English	Français	Deutsch	Italiano	Español
Body: Aluminum Clear alodine	Corps: Aluminium Passivation claire	Hülse: Aluminium Klar chromatiert	Corpo: Alluminio Passivato chiara	Cuerpo: Aluminio Pasivado claro
Stem: Steel Zinc plated	Tige: Acier Revêtement zingué	Dorn: Stahl Verzinkt	Gambo: Acciaio Zincati	Vástago: Acero Zincado
Tubular Component: Aluminum Clear alodine	Composant tubulaire: Aluminium Passivation claire	Röhrenförmiges Gegen- stück: Aluminium Klar chromatiert	Componente tubulare: Alluminio Passivazione chiara	Componente tubular: Aluminio Pasivado claro




ø			øD ₁	L ₁	øA ₁	B ₁	øS	øD ₂	L ₂	øA ₂	B ₂	 lbf (kN) ¹⁾	Part No.	
	min.	max.												
3/16" (4.8)	.625 (15.88)	.750 (19.05)	.250 (6.4)	.125 (3.18)	.525 (13.4)	.375 (9.53)	.059 (1.50)	.076 (1.93)	.188 (4.78)	.585 (14.9)	.375 (9.53)	.057 (1.45)	N/A	BSLMS-06BP-12
	.688 (17.48)	.875 (22.23)								.647 (16.5)				BSLMS-06BP-14
	.875 (22.23)	1.063 (27.00)								.825 (21.0)				BSLMS-06BP-17
	1.063 (27.00)	1.250 (31.75)								1.012 (25.7)				BSLMS-06BP-20
	1.250 (31.75)	1.438 (36.53)								1.200 (30.5)				BSLMS-06BP-23
	1.438 (36.53)	1.625 (41.28)								1.387 (35.3)				BSLMS-06BP-26
	1.625 (41.28)	1.813 (46.05)								1.575 (40.1)				BSLMS-06BP-29
	1.813 (45.05)	2.000 (50.80)								1.762 (44.8)				BSLMS-06BP-32
	2.000 (50.80)	2.188 (55.58)								1.950 (49.6)				BSLMS-06BP-35
	2.188 (55.58)	2.375 (60.33)								2.137 (54.3)				BSLMS-06BP-38

dimensions in inches and (mm) / en pouces et (millimètre) / alle Maße in Zoll und (mm) / in pollici e (millimetri) / en pulgadas y (milímetros)

1) typical values / valeurs moyennes / typische Werte / Valori tipici / valores típicos

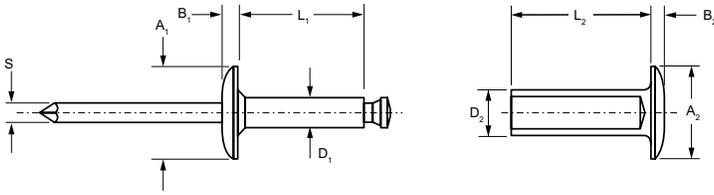

ø nom.			øD ₁	L ₁ max.	øA ₁	B ₁	øS	øD ₂	L ₂ max.	øA ₂	B ₂	 lbf (kN) ¹⁾	Part No.		
	min.	max.													
1/4" (6.4)	.625 (15.88)	.750 (19.05)	.312 (7.9)	.187 (4.75)	.608 (15.5)	.625 (15.88)	.095 (2.41)	.114 (2.90)	.250 (6.35)	.580 (14.8)	.625 (15.88)	.095 (2.41)	450 (2.00)	BSLMS-08BP-12	
	.750 (19.05)	.875 (22.23)								.442 (11.3)				.695 (17.7)	BSLMS-08BP-14
	.875 (22.23)	1.125 (28.58)								.820 (20.9)				.820 (20.9)	BSLMS-08BP-18
	1.125 (28.58)	1.375 (34.93)								1.070 (27.2)				1.070 (27.2)	BSLMS-08BP-22
	1.375 (34.93)	1.625 (41.28)								1.320 (33.6)				1.320 (33.6)	BSLMS-08BP-26
	1.625 (41.28)	1.875 (47.63)								1.570 (39.9)				1.570 (39.9)	BSLMS-08BP-30
	1.875 (47.63)	2.125 (53.98)								1.820 (46.3)				1.820 (46.3)	BSLMS-08BP-34
	2.125 (53.98)	2.375 (60.33)								2.070 (52.6)				2.070 (52.6)	BSLMS-08BP-38
	2.375 (60.33)	2.625 (66.68)								2.320 (59.0)				2.320 (59.0)	BSLMS-08BP-42
	2.625 (66.68)	2.875 (73.03)								2.570 (65.3)				2.570 (65.3)	BSLMS-08BP-46
	2.875 (73.03)	3.125 (79.38)								2.820 (71.7)				2.820 (71.7)	BSLMS-08BP-50
	3.125 (79.38)	3.375 (85.73)								3.070 (78.0)				3.070 (78.0)	BSLMS-08BP-54
	3.375 (85.73)	3.625 (92.08)								3.320 (84.4)				3.320 (84.4)	BSLMS-08BP-58
	3.625 (92.08)	3.875 (98.43)								3.570 (90.7)				3.570 (90.7)	BSLMS-08BP-62

dimensions in inches and (mm) / en pouces et (millimètre) / alle Maße in Zoll und (mm) / in pollici e (millimetri) / en pulgadas y (milímetros)

1) typical values / valeurs moyennes / typische Werte / Valori tipici / valores típicos