





English	Français	Deutsch	Italiano	Español
Body: Aluminum alloy* (5 % Mg) Natural	Corps: Alliage d'aluminium* (5% Mg) Brut	Hülse: Aluminium* (5 % Mg) Blank	Corpo: Lega di alluminio* (5% Mg) Nessuna finitura	Cuerpo: Aluminio* (5% Mg) Natural
Stem: Steel** Zinc plated	Tige: Acier** Revêtement zingué	Dorn: Stahl** verzinkt	Gambo: Acciaio** Zincati	Vástago: Acero** Zincado

*: BS 1473 5056 DIN 1725 AlMg5 Werkstoff 3.3555
 **: BS3111 Type 1 SAE 1038 DIN 1654 Cq35

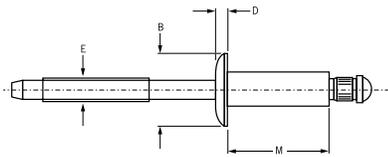


BSPQ

Protruding head
Tête bombée / Flachrundkopf /
Testa tonda / Cabeza alomada

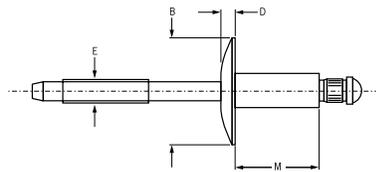


BSLQ

Large flange
Tête large / Flachrundkopf, extragroß /
Testa larga / Cabeza ancha

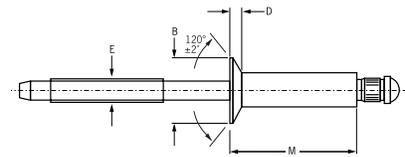

BSCQ

Countersunk
Tête fraisée / Senkkopf /
Testa svasata / Cabeza avellanada

ø							BSPQ ■			BSLQ ■			BSCQ ■									
	nom.	min.	mid. ¹⁾	max.	min.	max.	M	øE	øB	D	Part No.	øB	D	Part No.	øB ±.007 (±0.2)	D	Part No.					
1/8" (3.2)	.063 (1.60)	.093 (2.36)	.125 (3.18)	.129 (3.3)	.133 (3.4)	.275 (7.0)	.075 (1.9)	±.012 (6.3)	.042 (1.1)	04-02	.375 (9.5)	.065 (1.7)	04-04	.226 (5.7)	.032 (0.8)	04-03	04-04	04-05	04-06	04-07	04-08	
	.094 (2.39)	.140 (3.56)	.187 (4.75)			.337 (8.6)																04-03
	.126 (3.20)	.187 (4.75)	.250 (6.35)			.400 (10.2)																04-04
	.188 (4.78)	.250 (6.35)	.312 (7.92)			.462 (11.8)																04-05
	.251 (6.38)	.312 (7.92)	.375 (9.53)			.535 (13.6)																04-06
	.313 (7.95)	.375 (9.53)	.437 (11.10)			.602 (15.3)																04-07
	.376 (9.55)	.437 (11.10)	.500 (12.70)			.670 (17.1)																04-08
	5/32" (4.0)	.062 (1.57)	.093 (2.36)			.125 (3.18)																.160 (4.1)
.094 (2.39)		.140 (3.56)	.187 (4.75)	.362 (9.2)	05-03																	
.126 (3.20)		.187 (4.75)	.250 (6.35)	.425 (10.8)	05-04																	
.251 (6.38)		.312 (7.92)	.375 (9.53)	.550 (14.0)	05-06																	
.376 (9.55)		.437 (11.10)	.500 (12.70)	.695 (17.7)	05-08																	

dimensions in inches and (mm) / en pouces et (millimètre) / alle Maße in Zoll und (mm) / in pollici e (millimetri) / en pulgadas y (milímetros)

1) Stems break flush with rivet head at mid. grip

La tige rompt affleurante à la tête du rivet en milieu de plage de serrage

Bei mittlerem Klemmbereich (mid.) reißt der Dorn bündig mit dem Nietkopf ab


Q Rivet rottura del chiodo a livello della testa del rivetto per grip medio

El punto de rotura del Q Rivet es a ras con la cabeza del chiodo en el intermedio




TEL 031 427 0541

Q Rivet BSPQ / BSLQ / BSCQ Series
Aluminum / Steel

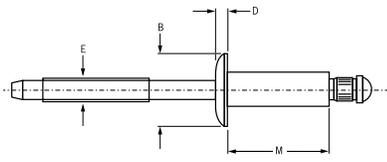


BSPQ

Protruding head
Tête bombée / Flachrundkopf /
Testa tonda / Cabeza alomada

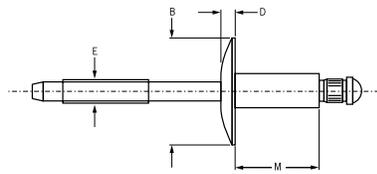

BSLQ

Large flange
Tête large / Flachrundkopf, extragroß /
Testa larga / Cabeza ancha

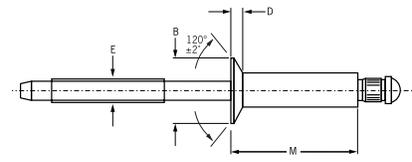

BSCQ

Countersunk
Tête fraisée / Senkkopf /
Testa svasata / Cabeza avellanada

ø						M	øE	BSPQ ■			BSLQ ■			BSCQ ■			
	nom.	min.	mid. ¹⁾	max.	min.			max.	max.	ref.	øB	D	Part No.	øB	D	Part No.	øB
										max.	■		max.	■	±.007 (±0.2)	ref.	■
3/16" (4.8)	.062 (1.57)	.093 (2.36)	.125 (3.18)	.192 (4.9)	.196 (5.0)	.325 (8.3)	.114 (2.9)	.375 ±.019 (9.5) (±0.5)	.060 (1.6)		06-02	.625 ±.025 (15.9) (±0.7)	.092 (2.4)		.344 (8.7)	.050 (1.3)	
	.094 (2.39)	.140 (3.56)	.187 (4.75)			.387 (9.4)				06-03							
	.126 (3.20)	.187 (4.75)	.250 (6.35)			.450 (11.5)				06-04				06-04			
	.188 (4.78)	.250 (6.35)	.312 (7.92)			.512 (13.0)				06-05				06-05			
	.251 (6.38)	.312 (7.92)	.375 (9.53)			.575 (14.7)				06-06				06-06			
	.376 (9.55)	.437 (11.10)	.500 (12.70)			.700 (17.8)				06-08				06-08			
	.501 (12.73)	.562 (14.27)	.625 (15.88)			.850 (21.6)				06-10				06-10			
1/4" (6.4)	.062 (1.57)	.093 (2.36)	.125 (3.18)	.257 (6.5)	.261 (6.6)	.375 (9.6)	.151 (3.8)	.500 ±.025 (12.7) (±0.7)	.078 (2.0)		08-02	.750 ±.025 (19.1) (±0.7)	.107 (2.8)		.468 (11.9)	.071 (1.8)	
	.126 (3.20)	.187 (4.75)	.250 (6.35)			.500 (12.7)				08-04				08-04			
	.251 (6.38)	.312 (7.92)	.375 (9.53)			.625 (15.9)				08-06				08-06			
	.376 (9.55)	.437 (11.10)	.500 (12.70)			.750 (19.1)				08-08				08-08			
	.501 (12.73)	.562 (14.27)	.625 (15.88)			.900 (22.9)				08-10							

dimensions in inches and (mm) / en pouces et (millimètre) / alle Maße in Zoll und (mm) / in pollici e (millimetri) / en pulgadas y (milímetros)

1) Stems break flush with rivet head at mid. grip

La tige rompt affleurante à la tête du rivet en milieu de plage de serrage

Bei mittlerem Klemmbereich (mid.) reißt der Dorn bündig mit dem Nietkopf ab

Q Rivet rottura del chiodo a livello della testa del rivetto per grip medio

El punto de rotura del Q Rivet es a ras con la cabeza del remache en su grip intermedio

ø		
nom.	lbf (kN) ²⁾	lbf (kN) ²⁾
1/8" (3.2)	350 (1.56)	325 (1.45)
5/32" (4.0)	525 (2.34)	450 (2.00)
3/16" (4.8)	750 (3.34)	650 (2.89)
1/4" (6.4)	1250 (5.56)	1050 (4.67)

2) typical values / valeurs moyennes / typische Werte / Valori tipici / valores típicos