




English	Français	Deutsch	Italiano	Español
Low profile	Auto-affleurante	Extra kleiner Kopf	Testa a fila	Sin ala
Closed end	Borgne	Geschlossen	Fondo cieco	Fondo cerrado
Low carbon steel*	Acier bas carbone*	Stahl*	Acciaio a basso tenore di carbonio*	Acero bajo en carbono*
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente

* : DIN EN 10263-2 Qst 34-3, BS EN/DIN 10263-2 C8C, Werkstoff 1.0213, SAE 1008

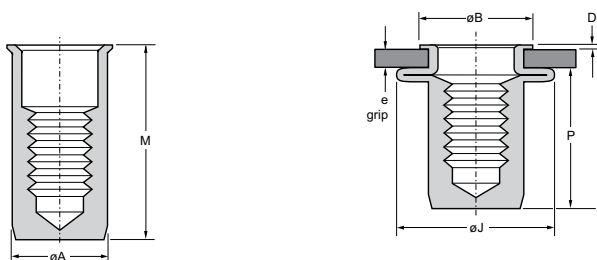

Thread filetage / Gewinde / filetto / rosca	e (grip)			ØA	ØB	D	ØJ	M	P	Part No/ref
	min.	max.	+0.1/-0	max.	max.	max.	max.	max.	max.	
M4 x 0.7	0.51	2.00	6.35	6.34	7.50	0.64	10.0	14.91	11.7	0FS38-70418
M5 x 0.8	0.51	3.00	7.15	7.13	8.26	0.64	12.2	20.26	15.5	0FS38-70521
M6 x 1.0	0.76	3.25	9.53	9.52	10.85	0.77	15.0	23.49	18.6	0FS38-70626
M8 x 1.25	0.91	3.70	10.60	10.59	11.74	0.77	16.8	23.63	18.1	0FS38-70829

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Thread filetage / Gewinde / filetto / rosca	 Recommended max. torque Nm max.	 Pull-out* kN	 Torque-to-turn* Nm min.	 Push-out* kN
M4 x 0.7	5.1	6.6	1.9	1.5
M5 x 0.8	7.9	8.0	2.6	1.9
M6 x 1.0	12.4	11.4	3.4	2.4
M8 x 1.25	16.4	15.7	3.6	2.8

* Values shown are typical and should be validated in the application / Les valeurs indiquées sont typiques et doivent être validées dans l'application / Die angegebenen Werte sind typisch und müssen in der Anwendung validiert werden / I valori riportati sono tipici e devono essere convalidate nella applicazione / Los valores mostrados son típicos y deben ser validados en la aplicación