



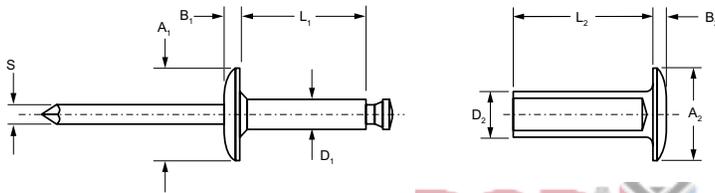


English	Français	Deutsch	Italiano	Español
Body: Steel Zinc plated	Corps: Acier Revêtement zingué	Hülse: Stahl Verzinkt	Corpo: Acciaio Zincati	Cuerpo: Acero Zincado
Stem: Steel Zinc plated	Tige: Acier Revêtement zingué	Dorn: Stahl Verzinkt	Gambo: Acciaio Zincati	Vástago: Acero Zincado
Tubular Component: Steel Zinc plated	Composant tubulaire: Acier Revêtement zingué	Röhrenförmiges Gegen- stück: Stahl Verzinkt	Componente tubulare: Acciaio Zincati	Componente tubular: Acero Zincado




ø nom.			øD ₁	L ₁ max.	øA ₁	B ₁	øS	øD ₂	L ₂ max.	øA ₂	B ₂	 lbf (kN) ¹⁾	Part No.	
	min.	max.												
3/16" (4.8)	.625 (15.88)	.750 (19.05)	.250 (6.4)	.125 (3.18)	.525 (13.4)	.375 (9.53)	.059 (1.50)	.076 (1.93)	.188 (4.78)	.585 (14.9)	.375 (9.53)	.057 (1.45)	N/A	SSLMS-06SP-12
	.688 (17.48)	.875 (22.23)								.647 (16.5)				SSLMS-06SP-14
	.875 (22.23)	1.063 (27.00)								.825 (21.0)				SSLMS-06SP-17
	1.063 (27.00)	1.250 (31.75)								1.012 (25.7)				SSLMS-06SP-20
	1.250 (31.75)	1.438 (36.53)								1.200 (30.5)				SSLMS-06SP-23
	1.438 (36.53)	1.625 (41.28)								1.387 (35.3)				SSLMS-06SP-26
	1.625 (41.28)	1.813 (46.05)								1.575 (40.1)				SSLMS-06SP-29
	1.813 (45.05)	2.000 (50.80)								1.762 (44.8)				SSLMS-06SP-32
	2.000 (50.80)	2.188 (55.58)								1.950 (49.6)				SSLMS-06SP-35
	2.188 (55.58)	2.375 (60.33)								2.137 (54.3)				SSLMS-06SP-38

dimensions in inches and (mm) / en pouces et (millimètre) / alle Maße in Zoll und (mm) / in pollici e (millimetri) / en pulgadas y (milímetros)

1) typical values / valeurs moyennes / typische Werte / Valori tipici / valores típicos

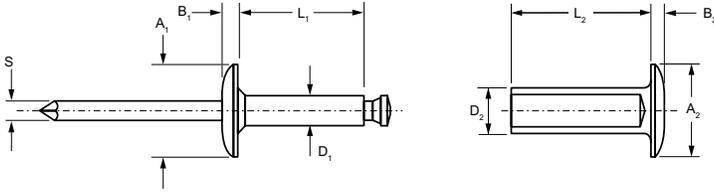

ø nom.			øD ₁	L ₁ max.	øA ₁	B ₁	øS	øD ₂	L ₂ max.	øA ₂	B ₂	 lbf (kN) ¹⁾	Part No.		
	min.	max.													
1/4" (6.4)	.625 (15.88)	.750 (19.05)	.312 (7.9)	.187 (4.75)	.608 (15.5)	.625 (15.88)	.095 (2.41)	.114 (2.90)	.250 (6.35)	.580 (14.8)	.625 (15.88)	.095 (2.41)	350 (1.55)	SSLMS-08SP-12	
	.750 (19.05)	.875 (22.23)								.442 (11.3)				.695 (17.7)	SSLMS-08SP-14
	.875 (22.23)	1.125 (28.58)								.820 (20.9)				SSLMS-08SP-18	
	1.125 (28.58)	1.375 (34.93)								1.070 (27.2)				SSLMS-08SP-22	
	1.375 (34.93)	1.625 (41.28)								1.320 (33.6)				SSLMS-08SP-26	
	1.625 (41.28)	1.875 (47.63)								1.570 (39.9)				SSLMS-08SP-30	
	1.875 (47.63)	2.125 (53.98)								1.820 (46.3)				SSLMS-08SP-34	
	2.125 (53.98)	2.375 (60.33)								2.070 (52.6)				SSLMS-08SP-38	
	2.375 (60.33)	2.625 (66.68)								2.320 (59.0)				SSLMS-08SP-42	
	2.625 (66.68)	2.875 (73.03)								2.570 (65.3)				SSLMS-08SP-46	
	2.875 (73.03)	3.125 (79.38)								2.820 (71.7)				SSLMS-08SP-50	
	3.125 (79.38)	3.375 (85.73)								3.070 (78.0)				SSLMS-08SP-54	
	3.375 (85.73)	3.625 (92.08)								3.320 (84.4)				SSLMS-08SP-58	
	3.625 (92.08)	3.875 (98.43)								3.570 (90.7)				SSLMS-08SP-62	

dimensions in inches and (mm) / en pouces et (millimètre) / alle Maße in Zoll und (mm) / in pollici e (millimetri) / en pulgadas y (milímetros)
1) typical values / valeurs moyennes / typische Werte / Valori tipici / valores típicos