




| English                                      | Français                      | Deutsch                    | Italiano                       | Español                   |
|----------------------------------------------|-------------------------------|----------------------------|--------------------------------|---------------------------|
| 120° Countersunk head                        | 120° Tête fraisée             | 120° Senkkopf              | 120° Testa svasata             | 120° Cabeza avellanada    |
| Steel*                                       | Acier*                        | Stahl*                     | Acciaio*                       | Acero*                    |
| Zinc plated                                  | Revêtement zingué             | Verzinkt                   | Zincato                        | Zincado                   |
| Clear trivalent passivated                   | Passivation claire trivalente | Klar chromatiert, Cr6-frei | Passivazione chiara trivalente | Pasivado claro trivalente |
| * : EN 10263-2 C8C SAE 1008 DIN 1654 QSt34-3 |                               |                            |                                |                           |

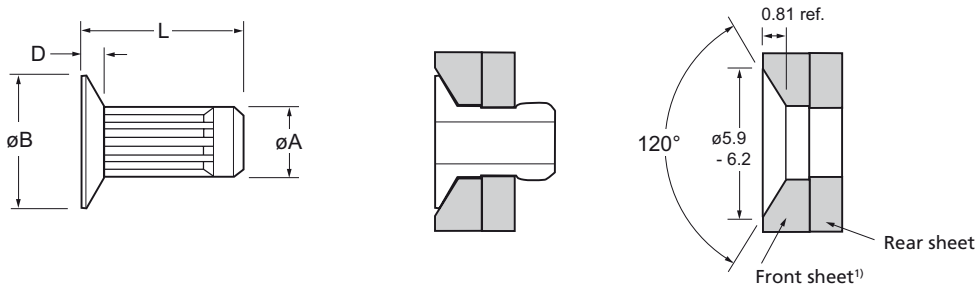

| Ø          | Front sheet |      | Rear sheet |      | ØB   | D    | L    | ØA   | kN <sup>2)</sup> | kN <sup>2)</sup> | ± 1 | Part No/ref |
|------------|-------------|------|------------|------|------|------|------|------|------------------|------------------|-----|-------------|
|            | min.        | max. | min.       | max. |      |      |      |      |                  |                  |     |             |
| 3.2 (1/8") | 1.0         | 2.0  | 3.26       | 3.34 | 5.84 | 0.80 | 4.8  | 3.17 | 0.94             | 1.92             | 64  | 57221-03204 |
|            |             | 4.5  |            |      |      |      | 7.3  |      | 1.15             | 1.76             | 42  | 57221-03207 |
|            |             | 8.6  |            |      |      |      | 11.5 |      | 1.15             | 1.68             | 27  | 57221-03211 |

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

1) Front sheet thickness must exceed the full depth of countersink. / L'épaisseur de la pièce recevant la tête fraisée doit être plus importante que la profondeur de fraisage. / Die Materialstärke des oberen Bauteils muss die volle Tiefe der Senkung überschreiten. / Spessore della lamiera anteriore deve superare la profondità di svasatura. / El espesor de la pieza delantera debe superar la profundidad de avellanado.

2) typical values / valeurs moyennes / typische Werte / Valori tipici / valores típicos