




| English | Français | Deutsch | Italiano | Español |
|--|--|--|---------------------------------------|---|
| Countersunk | Tête fraisée | Senkkopf | Testa svasata | Cabeza avellanada |
| Body: Nickel Copper Alloy Zinc plated | Corps: Alliage de nickel cuivre Revêtement zingué | Hülse: Nickel Kupfer Legierung Verzinkt | Corpo: Lega di nickel rame Zincato | Cuerpo: Aleación de níquel cobre Zincado |
| Stem: Stainless Steel | Tige: Inox | Dorn: Edelstahl | Gambo: Acciaio inox | Vástago: Acero inoxidable |

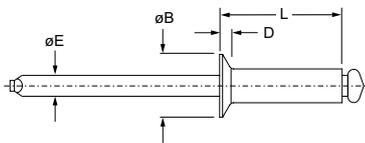

| Ø nom. | | | | | L ref. | ØE ref. | ØB max. | D max. | kN ¹⁾ | kN ¹⁾ | Part No. |
|----------------|------|------|------|------|-----------|------------|------------|-----------|----------------------|----------------------|-------------|
| | min. | max. | min. | max. | | | | | | | |
| 3.2 (1/8") | 0.8 | 2.5 | 3.3 | 3.4 | 5.9 | 1.93 | 6.3 | 1.0 | 1.50 | 1.90 | TLPK 419 SS |
| | 2.5 | 3.8 | | | 7.1 | | | | | | TLPK 424 SS |
| | 3.8 | 5.1 | | | 8.4 | | | | | | TLPK 429 SS |
| | 5.1 | 6.6 | | | 9.9 | | | | | | TLPK 435 SS |
| | 6.6 | 7.9 | | | 11.2 | | | | | | TLPK 440 SS |
| | 2.0 | 3.3 | | | 7.7 | | | | | | TLPK 524 SS |
| 4.0 (5/32") | 3.3 | 4.8 | 4.1 | 4.2 | 8.7 | 2.29 | 7.0 | 1.2 | 2.20 | 3.00 | TLPK 530 SS |
| | 4.8 | 6.6 | | | 10.5 | | | | | | TLPK 537 SS |
| | 6.6 | 7.4 | | | 11.3 | | | | | | TLPK 540 SS |
| | 3.1 | 4.6 | | | 8.9 | | | | | | TLPK 630 SS |
| 4.8 (3/16") | 5.8 | 6.6 | 4.9 | 5.0 | 11.2 | 2.90 | 8.4 | 1.4 | 3.30 | 3.75 | TLPK 639 SS |
| | 6.6 | 9.4 | | | 14.0 | | | | | | TLPK 650 SS |
| | 9.4 | 13.2 | | | 17.8 | | | | | | TLPK 665 SS |
| | 13.2 | 15.8 | | | 20.3 | | | | | | TLPK 675 SS |

all dimensions in mm / en millimètre / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / valores típicos