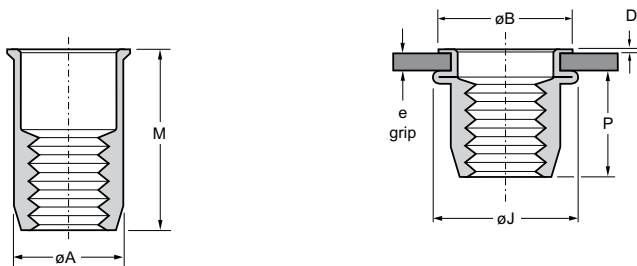








English	Français	Deutsch	Italiano	Español
Low profile	Auto-affleurante	Extra kleiner Kopf	Testa a fila	Sin ala
Stainless steel*	Inox*	Edelstahl*	Acciaio inox*	Acero inoxidable*
Natural	Brut	Blank	Nessuna finitura	Natural

* : Werkstoff 1.4305



Thread filetage / Gewinde / filetto / rosca	e (grip)			ØA	ØB	D	ØJ	M	P	Part No/ref
	min.	max.	+0.1/-0	max.	max.	max.	max.	max.	max.	
M3 x 0.5	0.51	1.50	4.75	4.73	5.77	0.64	8.4	9.15	5.8	09468-00310
M4 x 0.7	0.51	2.00	6.35	6.32	7.50	0.64	10.3	10.42	7.2	09468-00413
M5 x 0.8	0.51	3.00	7.15	7.11	8.26	0.64	12.7	11.82	7.0	09468-00514
M6 x 1.0	0.76	3.25	9.53	9.50	10.85	0.77	15.5	14.61	9.5	09468-00619
M8 x 1.25	0.91	3.70	10.60	10.57	11.74	0.77	17.2	16.13	10.1	09468-05821
M10 x 1.5	1.00	3.60	14.30	14.28	15.80	0.77	23.3	18.62	10.5	09468-01023

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Thread filetage / Gewinde / filetto / rosca	 Recommended max. torque Nm max.	 Pull-out* kN	 Torque-to-turn* Nm min.	 Push-out* kN
M3 x 0.5	4.0	8.2	0.4	1.0
M4 x 0.7	5.6	9.2	1.9	2.0
M5 x 0.8	11.3	12.0	2.6	2.7
M6 x 1.0	16.9	18.3	3.4	2.9
M8 x 1.25	22.6	24.2	3.6	3.2
M10 x 1.5	33.8	33.9	4.2	4.2

* Values shown are typical and should be validated in the application / Les valeurs indiquées sont typiques et doivent être validées dans l'application / Die angegebenen Werte sind typisch und müssen in der Anwendung validiert werden / I valori riportati sono tipici e devono essere convalidate nella applicazione / Los valores mostrados son típicos y deben ser validados en la aplicación