





English	Français	Deutsch	Italiano	Español
Dome head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Body: Low carbon steel*	Corps: Acier bas carbone*	Hülse: Stahl*	Corpo: Acciaio a basso tenore di carbonio*	Cuerpo: Acero bajo en carbono*
Zinc plated	Revêtement zingué	Verzinkt	Zincato, Passivazione chiara trivalente	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei		Pasivado claro trivalente
Stem: Medium carbon steel**	Tige: Acier au carbone**	Dorn: Stahl**	Gambo: Acciaio a medio tenore di carbonio**	Vástago: Acero medio en carbono**
Zinc plated	Revêtement zingué	Verzinkt	Zincato, Passivazione chiara trivalente	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei		Pasivado claro trivalente

*: C15C, Werkstoff 1.0234, EN 10263-2

** : C45RC, Werkstoff 1.1061, EN 10263-4

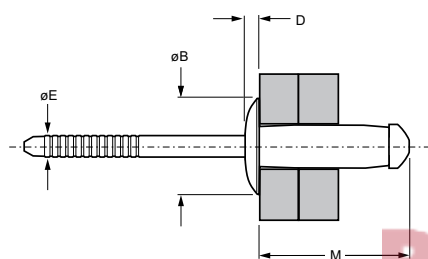

Ø					M	ØB	D	ØE			Part No/ref
nom.	min.	max.	min.	max.	max.	max.	max.	max.	kN ¹⁾²⁾	kN ¹⁾	
6.4 (1/4")	1.5	5.5	6.6	7.0	17.3	13.4	3.1	4.87	11.10	6.80	0BN01-00816
	5.0	9.0			21.3						0BN01-00820

all dimensions in mm / en millimètre / alle Maße in mm / in millimetri / en milímetros

1) typical values with test method according to ISO 14589 (2000) / Valeurs moyennes obtenues selon la méthode de test de la norme ISO 14589 (2000) / typische Werte ermittelt nach Testmethode ISO 14589 (2000) / valori tipici con il metodo di prova secondo la normativa ISO 14589 (2000) / valores típicos según ensayos ISO 14589 (2000)

2) through stem / avec tige / bei tragendem Restdorn / attraverso il gambo / con el vástago en la zona de cortadura